



DIAFRAMMI PER FLUIDI SPORCHI O CONTENENTI IMPUREZZE'
ORIFICE PLATES FOR DIRTY FLUID OR CONTAINING IMPURENESS

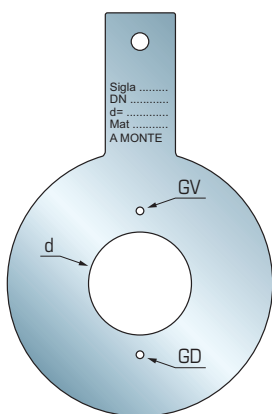

- Concentrico
 - *Concentric*

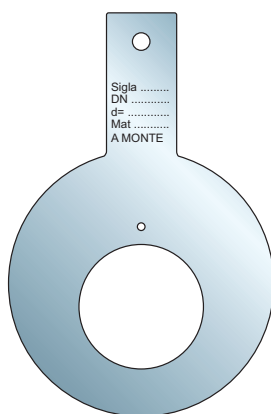

- Eccentrico
 - *Eccentric*



- Segmentale
 - *Segmental*

Fori di spurgo e sfiato
Drain and vent hole

Tolleranze foro calibrato **d** in accordo:
 ISA RP3.2, ISO 5167, API-RP550, ASME PTC19.5

Orifice bore **d** tolerances in according:
 ISA RP3.2, ISO 5167, API-RP550, ASME PTC19.5

d		GV - GD
da <i>from</i>	a <i>to</i>	dimensione foro mm <i>Hole dimension mm</i>
< 25.400		-
25.400	88.900	2.38
88.901	104.775	3.18
104.776	127.000	3.97
127.001	152.400	4.76
152.401	171.450	5.56
171.451	190.500	6.35
190.501	212.725	7.14
212.726	234.950	7.94
234.951	254.000	8.73
254.001	276.225	9.53
276.226	295.275	10.32
295.276	317.500	11.11
317.501	336.550	11.91
< 336.550		12.70

d		
da <i>from</i>	a <i>to</i>	Tolleranza ± <i>Tolerance ±</i>
< 6.350		
6.350	9.525	0.012
9.526	12.700	0.015
12.701	15.875	0.020
15.876	19.050	0.022
19.051	22.225	0.025
22.226	25.400	0.030
25.401	31.750	0.035
31.751	38.100	0.043
38.101	44.450	0.050
44.451	127.000	0.063
< 127.000		0.0005 d