

FLANGE TARATE A SOVRAPPOSIZIONE SLIP ON ORIFICE FLANGES

Modello
Model

RF-SO

Costruzione flange in accordo alle normative ANSI B16.5 - ANSI B16.36 ed alle indicazioni dell'AGA (American Gas Ass.).

Il gruppo di misura è fornito completo di:

- diaframma calibrato
- n. 2 tappi sulle prese di pressione
- n. 2 bulloni estrattori
- tiranti in ASTM A193-B7
- dadi in ASTM A194-2H

Principali materiali impiegati

Flange: Acciaio carbonio, Acciai legati, AISI 316, AISI 304.
Diaframmi: AISI 316, AISI 304, Monel, Hastelloy C, ecc.
Guarnizioni: a richiesta in Fibra Aramidica, Spirotalliche, ecc.


Manufactured according to standard ANSI B16.5 - ANSI B16.36 and AGA (American Gas Association) directives.

Orifice meter will supplied with:

- orifice plate
- n. 2 plugs
- n. 2 jack screw
- stud bolts in ASTM A1 93-B7
- nuts ASTM A1 94-2H

Main material used:

Orifice meter: Carbon steel, Alloy steel, AISI 316, AISI 304
Orifice plates: AISI 316, AISI 304, Monel, Hastelloy C, etc.
Gasket: On demand Aramidic Fiber, Spiralwound, ecc.

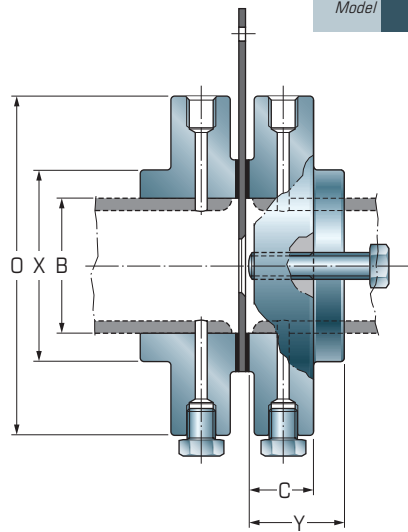

ANSI 600 RF SO

DN Size	O mm	C mm	Y mm	X mm	A mm	Peso kg. Weight kg.
1"	124	38,1	48,0	54	34,9	7,5
1 1/2"	156	38,1	48,0	70	50,0	9,3
2"	165	38,1	49,0	84	61,9	11,5
2 1/2"	190	38,1	51,0	100	74,6	15
3"	210	38,1	52,5	118	90,5	19
4"	273	44,5	60,3	152	115,9	42
5"	330	50,8	66,7	189	143,7	70
6"	356	54,0	73,0	222	170,6	91
8"	418	62,0	82,5	273	221,5	127
10"	508	70,0	92,0	343	276,2	200
12"	559	73,0	98,5	400	327,0	248

ANSI 300 RF SO

DN Size	O mm	C mm	Y mm	X mm	A mm	Peso kg. Weight kg.
1"	124	38,1	48,0	54	34,9	7,5
1 1/2"	156	38,1	48,0	70	50,0	9,3
2"	165	38,1	49,0	84	61,9	11,5
2 1/2"	190	38,1	51,0	100	74,6	15
3"	210	38,1	52,5	118	90,5	19
4"	254	38,1	54,0	146	115,9	29
5"	279	38,1	54,0	178	143,7	34
6"	318	38,1	54,0	206	170,6	50
8"	381	41,3	62,0	260	221,5	65
10"	444	47,6	67,0	321	276,2	91
12"	521	50,8	73,0	375	327,0	133
14"	584	54,0	76,0	425	360,0	177
16"	647	57,0	82,5	482	411,0	240
18"	711	60,5	89,0	533	462,0	323
20"	774	63,5	95,0	587	513,0	360
24"	914	70,0	106,5	702	614,0	555

ANSI 900 RF SO

DN Size	O mm	C mm	Y mm	X mm	A mm	Peso kg. Weight kg.
1"	149	41,3	54,0	52	34,9	13
1 1/2"	178	41,3	54,0	70	50,0	22
2"	216	44,5	64,0	105	61,9	31
2 1/2"	244	47,6	70,0	124	74,6	45
3"	241	44,5	60,0	127	90,5	37
4"	292	50,8	76,0	159	115,9	64
5"	349	57,2	86,0	191	143,7	96
6"	381	61,9	92,0	235	170,6	120
8"	470	69,9	108,0	298	221,5	191
10"	546	76,2	114,0	368	276,2	272
12"	610	85,7	124,0	419	327,0	359

ANSI 1500 RF SO

DN Size	O mm	C mm	Y mm	X mm	A mm	Peso kg. Weight kg.
1"	149	41,3	54,0	52	34,9	13
1 1/2"	178	41,3	54,0	70	50,0	22
2"	218	44,5	64,0	105	61,9	31
2 1/2"	244	47,6	70,0	124	74,6	45
3"	267	54,0	79,0	133	90,5	59
4"	311	60,3	97,0	162	115,9	86
5"	375	79,4	111,0	197	143,7	151
6"	394	88,9	126,0	229	170,6	188
8"	483	98,4	149,0	292	221,5	291
10"	584	114,3	165,0	368	276,2	496
12"	673	130,2	187,0	451	327,0	765