



**COMMUTATORE PNEUMATICO**  
**PNEUMATIC SWITCH**

**Mod. COM**

Commutatore pneumatico particolarmente adatto per linee aria strumenti. Il commutatore può essere fornito in due tipi:

- Semplice: 2 vie - 2 posizioni
- Doppio: 4 vie - 2 posizioni

**Caratteristiche tecniche:**

- Pressione esercizio max.: 10 Bar
- Temperatura esercizio max.: 60°C
- Attacchi filettati: 1/4" NPT-F
- Tenute: Viton
- Materiali corpo: Ottone - AISI 316
- Volantino con indice: Bachelite

**Indice in Pos. 1**

- V1 in collegamento con S
- V2 in collegamento con E

**Indice in Pos. 2**

- V1 in collegamento con E
- V2 in collegamento con S

*Pneumatic switch suitable for instruments air line.*

*The pneumatic switch is supplied in two model:*

*Single: 2 ways - 2 positions*

*Double: 4 ways - 2 positions*

**Characteristics:**


- Max operating pressure: 10 Bar
- Max operating temperature: 60°C
- Threaded connections: 1/4" NPT-F
- Packing: Viton
- Material: Brass - AISI 316
- Handwheel with indicator: Bakelite

**Indicator in Pos. 1**

- V1 in connection with S
- V2 in connection with E


**Indicator in Pos. 2**

- V1 in connection with E
- V2 in connection with S

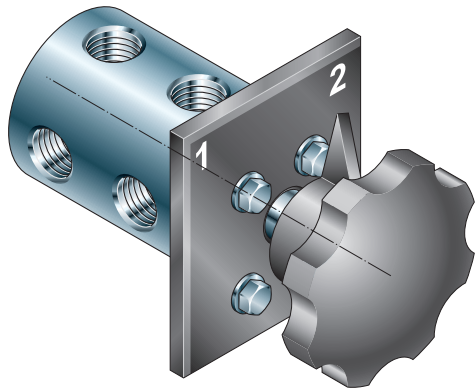

| Modello<br>Model | Attacchi processo<br>Process connections | DN<br>Size  | Materiale<br>Material |
|------------------|------------------------------------------|-------------|-----------------------|
| <b>COM/S/OT</b>  | Singolo - <i>Single</i>                  | <b>1/4"</b> | Ottone - <i>Brass</i> |
| <b>COM/S/16</b>  | Singolo - <i>Single</i>                  | <b>1/4"</b> | AISI 316              |
| <b>COM/D/OT</b>  | Doppio - <i>Double</i>                   | <b>1/4"</b> | Ottone - <i>Brass</i> |
| <b>COM/D/16</b>  | Doppio - <i>Double</i>                   | <b>1/4"</b> | AISI 316              |

**POS. 1**

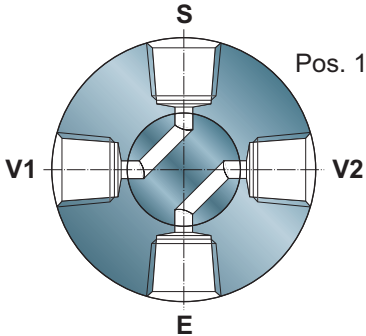

**POS. 2**

