


VALVOLE A SPILLO DA BARRA - MODELLO V04CD
NEEDLE PLUG VALVES FROM BAR STOCK - MODEL V04CD

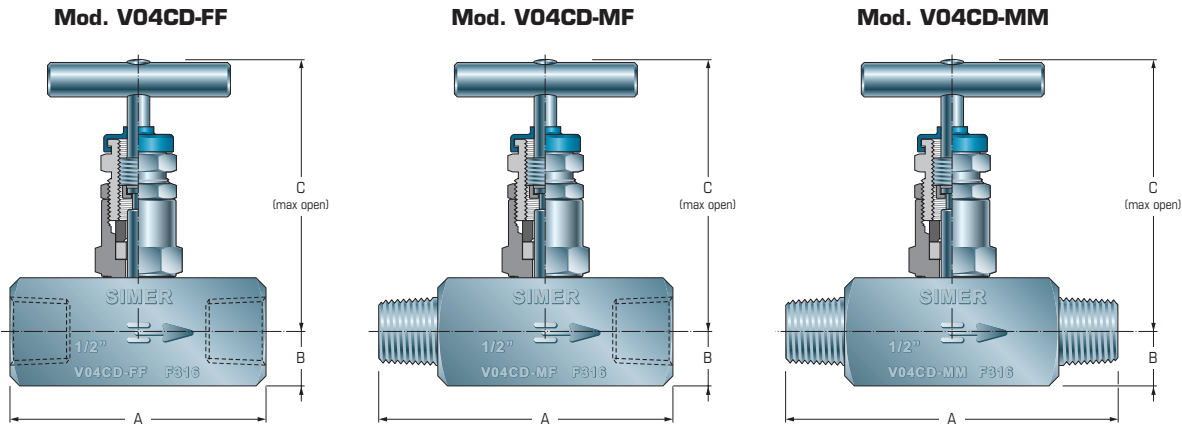

Valvola a spillo adatta per intercettazione strumenti e uso generale per linee di piccolo diametro.

Specifiche tecniche

- Corpo da barra con bonnet filettato esternamente
- Connessioni: 180° Filettate o tasca a saldare
- Pressione nominale di esercizio:
Serie 3000-6000 / 210- 420 Kg/cmq
- Baderne in Teflon come standard per temperature fino a 180°C
- Per temperature fino a 500°C si forniscono baderne in Grafoil.
- Materiali: AISI 316. Altri materiali a richiesta

Needle plug valve for instrument cut-off and general use on small diameter pipe lines.

Technical specifications

- Bar stock body with outside screwed bonnet
- Connections: 180° Threaded or socket welding
- Nominal operating pressure:
Serie 3000-6000 / 210- 420 Kg/cmq
- Packing material P.T.F.E. as standard max temperature 180°C
- Packing for temperature until 500°C in Grafoil
- Material: AISI 316. Other material on request

Modello Model	V04CD-FF		V04CD-MF		V04CD-MM	
Rating	S. 3000 / S. 6000					
Attacchi Connect	1/4"	1/2"	1/4"	1/2"	1/4"	1/2"
A	60	75	60	75	60	75
B	12,5	15	12,5	15	12,5	15
C	69	73	69	73	69	73

Come ordinare - How to order

V04CD-FF

- 3

/ 16

- 2

- N

- T

Modello - Model
180° **V04CD-FF**
180° **V04CD-MF**
180° **V04CD-MM**

Rating
S.3000 - **3**
S.6000 - **6**
S.10000 - **10**

Materiale - Material
AISI 304 - **04**
AISI 316 - **16**
AISI 316 L - **17**
Altri / Other - **00**

Dimensione attacchi
Connect dimension
1 - 3/4"
2 - 1/2"
4 - 1/4"

Tipo attacchi
Connect dimension
N - NTP
G - Gas Cil.
Gc - Gas con.
SW - Tasca saldare
Socket welding

Baderne - Packing
T - Teflon / PTFE
Max Temp. 180°C
G - Grafoil
Max. Temp. 500°