


VALVOLE A SPILLO DA BARRA - MODELLO V04CS
NEEDLE PLUG VALVES FROM BAR STOCK - MODEL V04CS

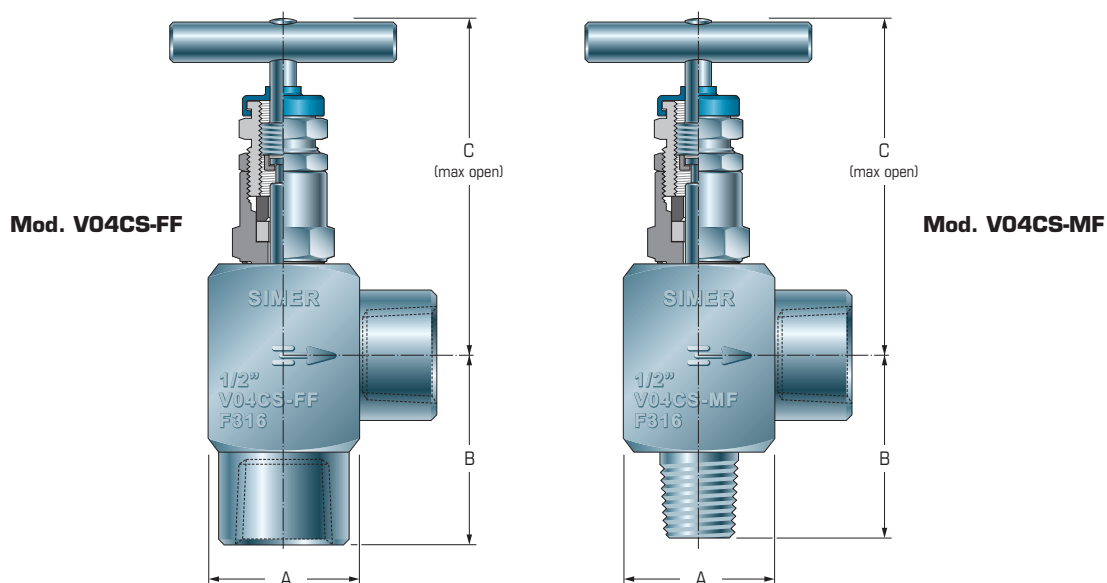

Sezione
Section

2

Valvola a spillo adatta per intercettazione strumenti e uso generale per linee di piccolo diametro.

Specifiche tecniche

- Corpo da barra con bonnet filettato internamente
- Connessioni: 90° Filettate o tasca a saldare
- Pressione nominale di esercizio:
Serie 3000-6000 / 210- 420 Kg/cm²
- Baderne in Teflon come standard per temperature fino a 180°C
- Per temperature fino a 500°C si forniscono baderne in Grafoil.
- Materiali: AISI 316. Altri materiali a richiesta

Needle plug valve for instrument cut-off and general use on small diameter pipe lines.

Technical specifications

- Bar stock body with insid screwed bonnet
- Connections: 90° Threaded or socket welding
- Nominal operating pressure:
Serie 3000-6000 / 210- 420 Kg/cm²
- Packing material P.T.F.E. as standard max temperature 180°C
- Packing for temperature until 500°C in Grafoil
- Material: AISI 316. Other material on request

Modello Model	V04CS-FF		V04CS-MF	
Rating	S. 3000 / S. 6000			
Attacchi Connect	1/4"	1/2"	1/4"	1/2"
A	25	30	25	30
B	30	35	30	35
C	70	72	70	72

Come ordinare - How to order

V04CS-FF	- 3	/ 16	- 2	- N	- T
Modello - Model 90° V04CS-FF 90° V04CS-MF	Rating S.3000 - 3 S.6000 - 6 S.10000 - 10	Materiale - Material AISI 304 - 04 AISI 316 - 16 AISI 316 L - 17 Altri / Other - 00	Dimensione attacchi Connect dimension 2 - 1/2" 4 - 1/4"	Tipo attacchi Connect dimension N - NTP G - Gas Cil. Gc - Gas con. SW - Tasca saldare Socket welding	Baderne - Packing T - Teflon / PTFE Max Temp. 180°C G - Grafoil Max. Temp. 500°