


VALVOLE A SPILLO PORTAMANOMETRO DA BARRA - MODELLO V05MVF
PRESSURE GAUGE NEEDLE VALVES FROM BAR STOCK - MODEL V05MVF

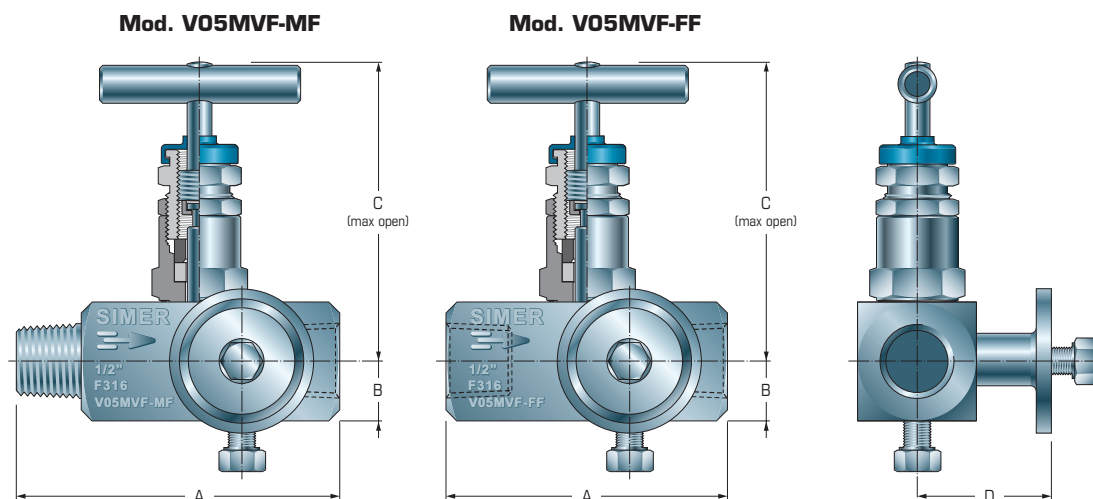


Specifiche tecniche

- Corpo da barra con bonnet filettato esternamente, vite di azzeramento e flangetta portamanometro campione nella parte laterale del corpo.
- Connessioni: 180° Filettate o tasca a saldare
- Pressione nominale di esercizio:
Serie 3000-6000 / 210- 420 Kg/cm²
- Baderne in Teflon come standard per temperature fino a 180°C
- Per temperature fino a 500°C si forniscono baderne in Grafoil.
- Materiali: AISI 316. Altri materiali a richiesta

Technical specifications

- Bar stock body with outside screwed bonnet, zeroing screw and pressure gauge flange in the lateral side.
- Connections: 180° Threaded or socket welding
- Nominal operating pressure:
Serie 3000-6000 / 210- 420 Kg/cm²
- Packing material P.T.F.E. as standard max temperature 180°C
- Packing for temperature until 500°C in Grafoil
- Material: AISI 316. Other material on request



Modello Model	V05MVF-FF		V05MVF-MF	
Rating	S. 3000 / S. 6000			
Attacchi Connect	1/4"	1/2"	1/4"	1/2"
A	70	75	70	75
B	15	15	15	15
C	75	75	75	75
D	35	35	35	35

Come ordinare - How to order

V05MVF-FF	- 3	/ 16	- 2	- N	- T
Modello - Model 180° V05MVF-FF 180° V05MVF-MF	Rating S.3000 - 3 S.6000 - 6	Materiale - Material AISI 304 - 04 AISI 316 - 16 AISI 316 L - 17 Altri / Other - 00	Dimensione attacchi Connect dimension 2 - 1/2" 4 - 1/4"	Tipo attacchi Connect dimension N - NTP G - Gas Cil. Gc - Gas con.	Baderne - Packing T - Teflon / PTFE Max Temp. 180°C G - Grafoil Max. Temp. 500°