



VALVOLE A SQUADRA DA CORPO FORGIATO - MODELLO V08CS
NEEDLE PLUG FORGED VALVES - MODEL V08CS

Mod. V08CS-FF

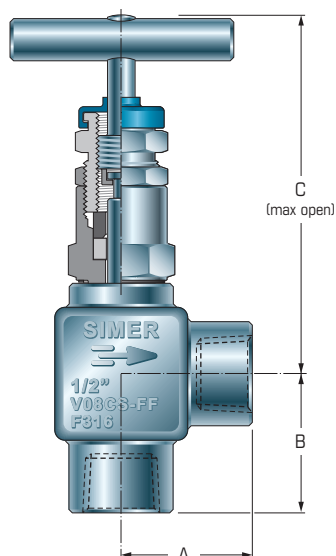

Mod. V08CS-MF

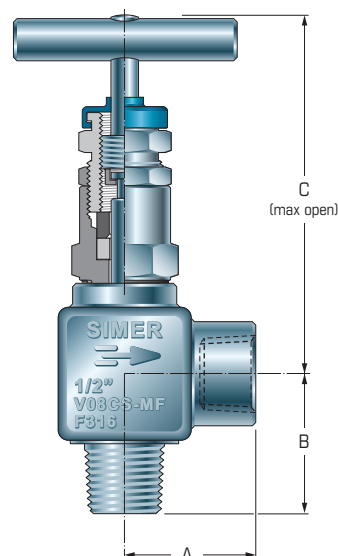

Sezione
Section

2

Valvola a spillo forgiata adatta per intercettazione strumenti e uso generale per linee di piccolo diametro.

Specifiche tecniche

- Corpo forgiato con bonnet filettato.
- Stelo saliente con otturatore snodato
- Connessioni: 90° Filettate
- Pressione nominale di esercizio:
Serie 3000 / 210 Kg/cm²
- Baderne in Teflon come standard per temperature fino a 180°C
- Per temperature fino a 500°C si forniscono baderne in Grafoil.
- Materiali: A105 - AISI 316. Altri materiali a richiesta

Needle plug valve for instrument cut-off and general use on small diameter pipe lines.

Technical specifications

- Forged body with screwed bonnet.
- Trim with free needle plug.
- Connections: 90° Threaded
- Nominal operating pressure:
Serie 3000 / 210 Kg/cm²
- Packing material P.T.F.E. as standard max temperature 180°C
- Packing for temperature until 500°C in Grafoil
- Material: A105 - AISI 316. Other material on request

Modello Model	V08CS-FF		V08CS-MF	
Rating	S. 3000			
Attacchi Connect	1/4"	3/8"	1/4"	3/8"
A	27	27	27	27
B	30	30	30	30
C	70	70	70	70

Come ordinare - How to order

V08CS-MF	- 3	/ 16	- 4	- N	- T
Modello - Model 90° V08CS-FF 90° V08CS-MF	Rating S.3000 - 3	Materiale - Material AISI 304 - 04 A105 - 05 AISI 316 - 16 AISI 316 L - 17 Altri / Other - 00	Dimensione attacchi Connect dimension 3 - 3/8" 4 - 1/4"	Tipo attacchi Connect dimension N - NTP G - Gas Cil. Gc - Gas con.	Baderne - Packing T - Teflon / PTFE Max Temp. 180°C G - Grafoil Max. Temp. 500°