


MANIFOLD A DUE VALVOLE PER STRUMENTI DI PRESSIONE
TWO VALVES MANIFOLD FOR PRESSURE INSTRUMENT

Mod. BM2V


Mod. BM2V / I

Esecuzione standard - 180°
Standard execution - 180°

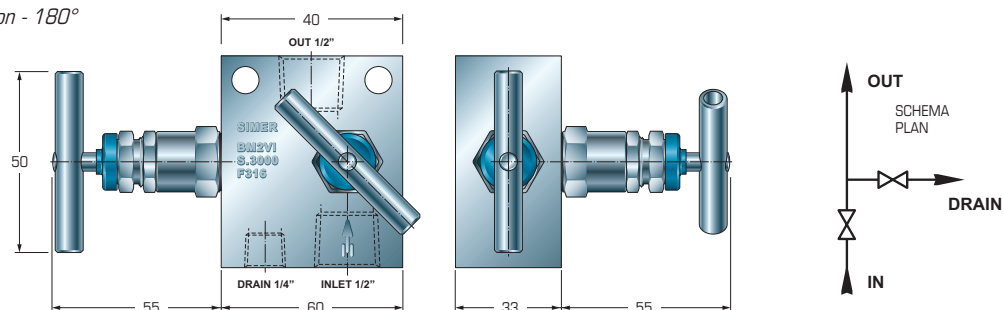

Mod. BM2V / L

Esecuzione standard - 90°
Standard execution - 90°

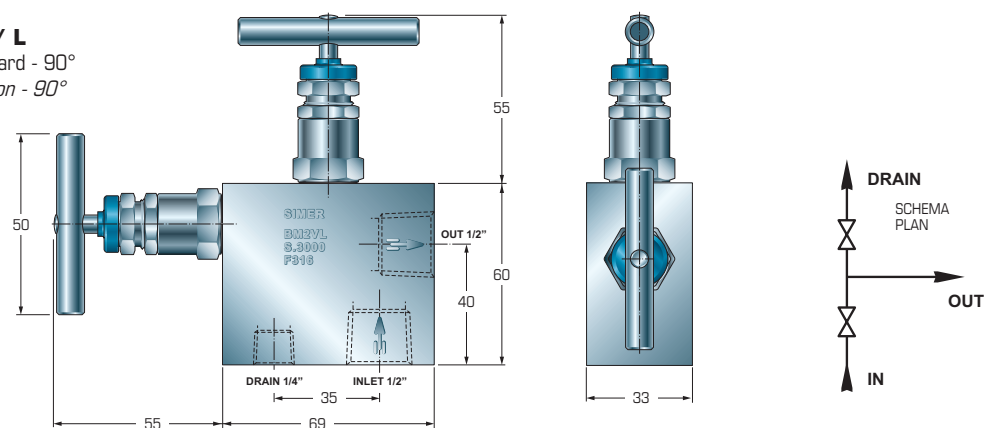

Caratteristiche tecniche

- Corpo da barra con bonnet filettato esternamente
- Connessioni: 90° o 180°
- Filettatura: 1/2" NPT-F. Altre filettature a richiesta
- Attacco di spurgo filettato 1/4" NPT-F
- Pressione nominale di esercizio:
SERIE 3000 - 6000 / 210 - 420 Kg/cmq.
- Baderne in Teflon come standard per temperature max. 180° C
Per temperature fino a 500°C si forniscono baderne in Grafoil.
- Materiali: AISI 316. Altri materiali a richiesta

Technical specifications

- Bar stock body with outside screwed bonnet
- Connections: 90° o 180°
- Thread: 1/2" NPT-F. Other threads on request
- Drain connection threaded 1/4" NPT-F
- Nominal operatin pressure:
SERIE 3000 - 6000 / 210 - 420 Kg/cmq.
- Packing material P.T.F.E. as standard max temperature 180° C
Grafoil packing for temperature until 500°C.
- Material: AISI 316. Other material on request

Come ordinare - How to order

BM2V/I

- 3

/ 16

- 2

- N

- T

Modello - Model

180° - **BM2V/I**
90° - **BM2V/L**

Rating

S.3000 - **3**
S.6000 - **6**

Materiale - Material

AISI 304 - **04**
AISI 316 - **16**
AISI 316 L - **17**
Altri / Other - **00**

**Dimensione attacchi
Connect dimension**

2 - 1/2"
4 - 1/4"

**Tipo attacchi
Connect dimension**

N - NTP
G - Gas Cil.
Gc - Gas con.
SW - Tasca saldare
Socket welding

Baderne - Packing

T - Teflon / PTFE
Max Temp. 180°C
G - Grafoil
Max. Temp. 500°