


MANIFOLD A CINQUE VALVOLE PER STRUMENTI A PRESSIONE DIFFERENZIALE
FIVE VALVES BY-PASS MANIFOLD FOR DIFFERENTIAL PRESSURE INSTRUMENT

Mod. BM5V

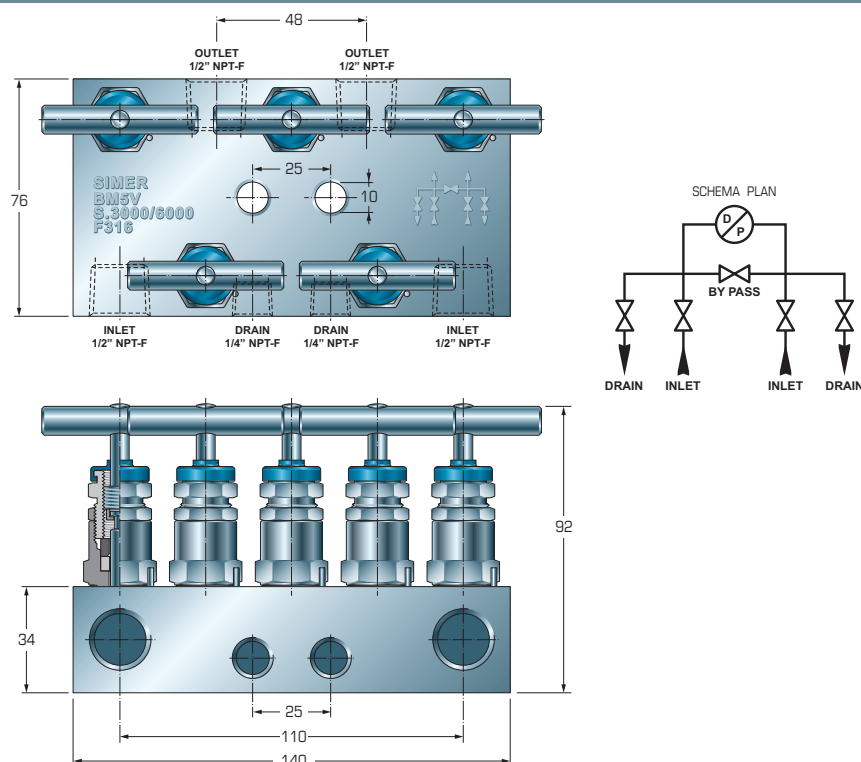

Caratteristiche tecniche

- Corpo da barra con bonnet filettato esternamente
- Connessioni standard:
Attacchi filettati 1/2" NPT-F a 180°
Altre filettature a richiesta.
- Attacchi di spurgo fil. 1/4" NPT-F ANSI B1.20.1
- Pressione nominale di esercizio:
SERIE 3000 - 6000 / 210 - 420 Kg/cm².
- Baderne in Teflon come standard per temperature fino a 180°C
Per temperature fino a 500°C si forniscono baderne in treccia speciale esente da amianto.
- Passaggi interni con diametro 5.0 mm
- Materiali: AISI 316. Altri materiali a richiesta

Technical specifications

- Bar stock body with inside screwed bonnet
- Standard connections:
Threaded connections 1/2" NPT-F 180° degrees
Other treads on request
- Vent connections thrd. 1/4" NPT-F ANSI B1.20.1
- Nominal operating pressure:
SERIE 3000 - 6000 / 210 - 420 Kg/cm².
- Packing material PTFE as standard max temperature 180°C.
For temperature until 500°C, special packing free asbestos.
- Orifice size 5,0 mm
- Material: AISI 316. Other material on request

Come ordinare - How to order

BM5V	- 3	/ 16	- 2	- N	- T
Modello - Model 180° - BM5V	Rating S.3000 - 3 S.6000 - 6	Materiale - Material AISI 304 - 04 AISI 316 - 16 AISI 316 L - 17 Altri / Other - 00	Dimensione attacchi Connect dimension 2 - 1/2" 4 - 1/4"	Tipo attacchi Connect dimension N - NTP G - Gas Cil. Gc - Gas con. SW - Tasca saldare Socket welding	Baderne - Packing T - Teflon / PTFE Max Temp. 180°C G - Grafoil Max. Temp. 500°