
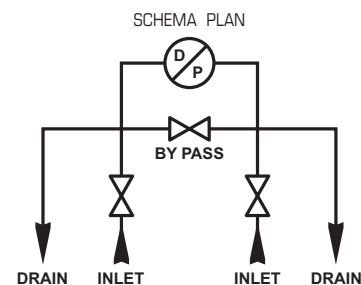
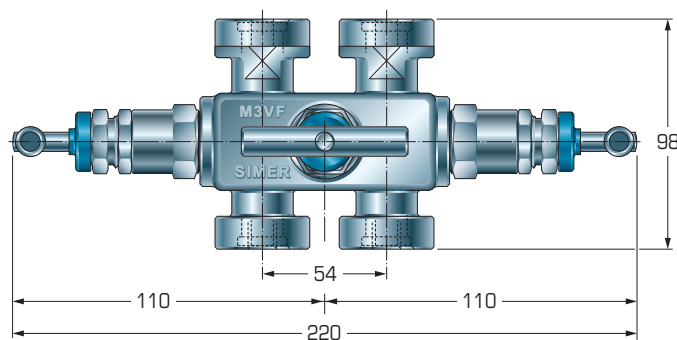


MANIFOLD A TRE VALVOLE PER STRUMENTI A PRESSIONE DIFFERENZIALE
THREE VALVES BY-PASS MANIFOLD FOR DIFFERENTIAL PRESSURE INSTRUMENTS

Mod. M3VF

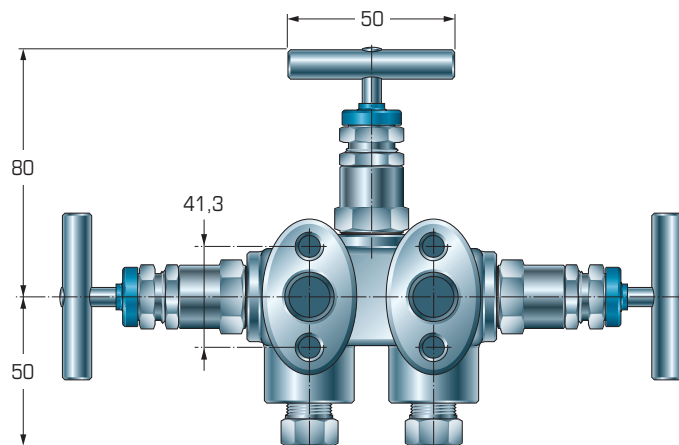

Specifiche tecniche

- Corpo forgiato a stampo con bonnet filettato internamente.
 - Connessioni: Flangiate
 - Attacco di spurgo filettato: 1/4" NPT-F.
 - Interasse attacchi: 54 mm
 - Pressione nominale di esercizio:
SERIE 3000 - 6000 / 210 - 420 Kg/cmq .
 - Baderne in Teflon come standard fino a 180°C.
- Per temperature fino a 500°C si forniscono baderne in treccia speciale esente da amianto.
- Passaggi interni con diametro 6.5 mm.
 - Materiali: A105 - AISI 316. Altri materiali a richiesta.

Technical specifications

- Forged body with inside screwed bonnet
 - Connections: Flanged
 - Drain connection threaded 1/4" NPT-F
 - Center to center connections length 54 mm
 - Nominal operating pressure:
Serie 3000 - 6000 / 210 - 420 Kg/cmq
 - Packing material P.T.F.E. as standard max temperature 180°C.
- Packing for temperature until 500°C in special plait free asbestos.
- Orifice size 6.5 mm
 - Material: A105 - AISI 316. Other material on request.