MANIFOLD DISTRIBUTORE
DISTRIBUTION MANIFOLD

Mod. MDL

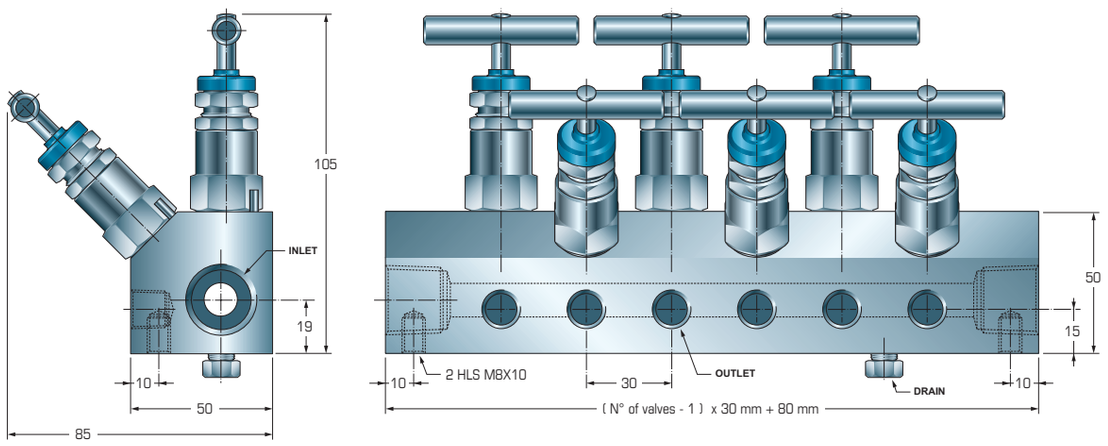

Caratteristiche tecniche

Il modello MDL è un manifold distributore ricavato da barra con valvole inclinate. Le due file di valvole sono sfalsate ed inclinate di 45° gradi tra loro.
Il manifold distributore è disponibile con un numero di valvole, fino ad un massimo di 12.
Il corpo è corredato di n. 2 fori di fissaggio filettati M8.
Pressione massima di esercizio: 6000 Psi - 414 Bar a seconda dei materiali impiegati.
Filettatura std. NPT ANSI B1.20.1. Altri filetti a richiesta.
Tenute in teflon. Altre tenute a richiesta.
Attacco di spurgo filettato 1/4" NPT-F ANSI B1.20.1.
La lunghezza del corpo varia in funzione del numero delle valvole ed in base ad una formula matematica che consente all'utilizzatore di calcolare gli ingombri:

L = [(No. di valvole - 1) x 30 mm] + 80 mm

Technical specifications

The type MDL bar stock distribution manifold, is of the staggered bonnet pattern.
The rows of the valves being offset by 45° degrees to each other. It is available with any number of bonnets up to a maximum of twelve.
The body is supplied with two fixing holes tappared M8.
Maximum working pressure is up to 6000 Psi - 414 Bar depending on material.
Std. thread NPT ANSI B1.20.1. Other thread on request.
Std. packing P.T.F.E. Other packing on request.
Drain connection threaded 1/4" NPT-F ANSI B1.20.1.
Body length is determined in function at valves number and formula that permit dimension calculus:

L = [(No. of valves - 1) x 30 mm] + 80 mm

Come ordinare - *How to order*

MDL	-	**6**	-	**2**	-	**2**	-	**16**
Modello - *Model* **MDL**		**Numero connessioni uscita** **Number outlet connection** **4** **6** **8** **10** **12**		**Connessioni ingresso** **Inlet connection** **1** - 3/4" NPT-F **2** - 1/2" NPT-F **3** - 3/8" NPT-F **4** - 1/4" NPT-F		**Connessioni uscita** **Outlet connection** **2** - 1/2" NPT-F **3** - 3/8" NPT-F **4** - 1/4" NPT-F		**Materiale - Material** A 105 - **05** AISI 304 - **04** AISI 316 - **16** AISI 316 L - **17** Altri / Other - **00**